





SE Walton Blvd. and SE J St. Intersection

The existing intersection of Walton Boulevard and SE J Street already operates at an overall intersection LOS F. Existing queues are the 5th worst in the city, extending beyond 2,000 feet. Additionally, the intersection is in the top 10 for number of crashes. To improve safety and operations at the intersection, it is recommended that dual left-turn lanes be added for northbound and southbound vehicles turning onto Walton Boulevard, and an additional through lane with a dedicated right-turn lane be constructed on the northbound approach. The added capacity is expected to reduce queues and delay by more than 50 percent.

Project Exhibit

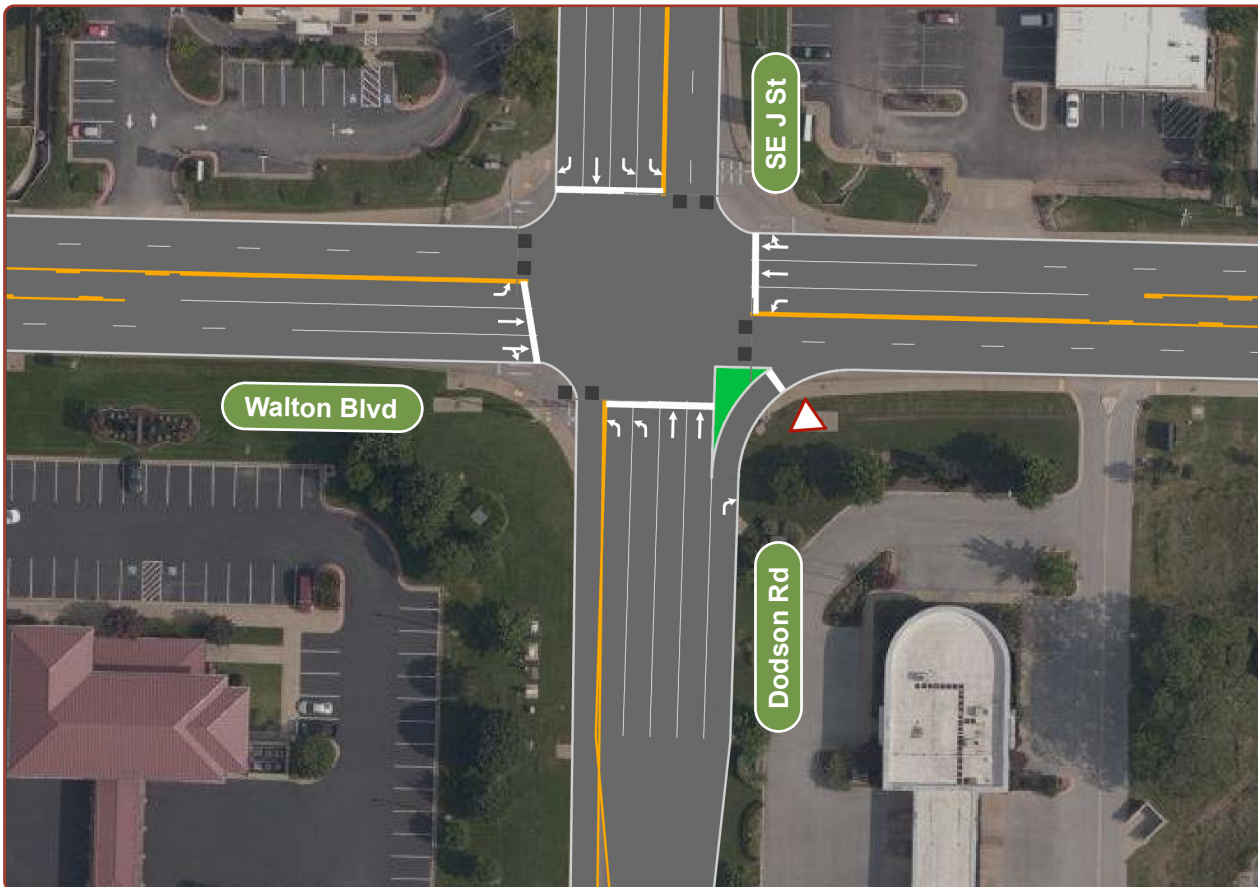

Project Timeline

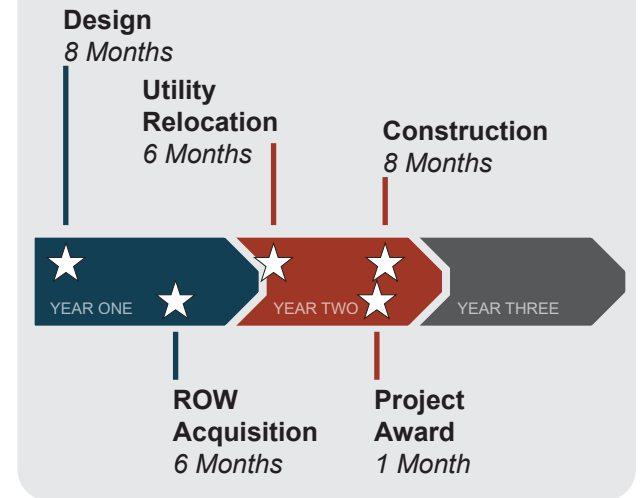

Estimated Costs

Task	Estimated Cost
Design/CE&I	\$ 200,000
ROW Acquisition	\$ 310,000
Utility Relocation	\$ 490,000
Construction	\$ 990,000
Total	\$ 1,990,000