





Walton Blvd. and Central Ave. Intersection

The existing intersection of Walton Boulevard and Central Avenue already operates at an overall intersection LOS F. It currently ranks in the top 10 for existing delay, number of crashes, and existing queues, with queues extending past 2,000 feet. To improve operations and safety at the intersection, it is recommended to construct dual eastbound and westbound left turns, longer storage bays eastbound and westbound, and dedicated northbound and southbound right-turn bays. These improvements reduce delay by 50 percent, and reduce queues by more than 65 percent.

Project Exhibit

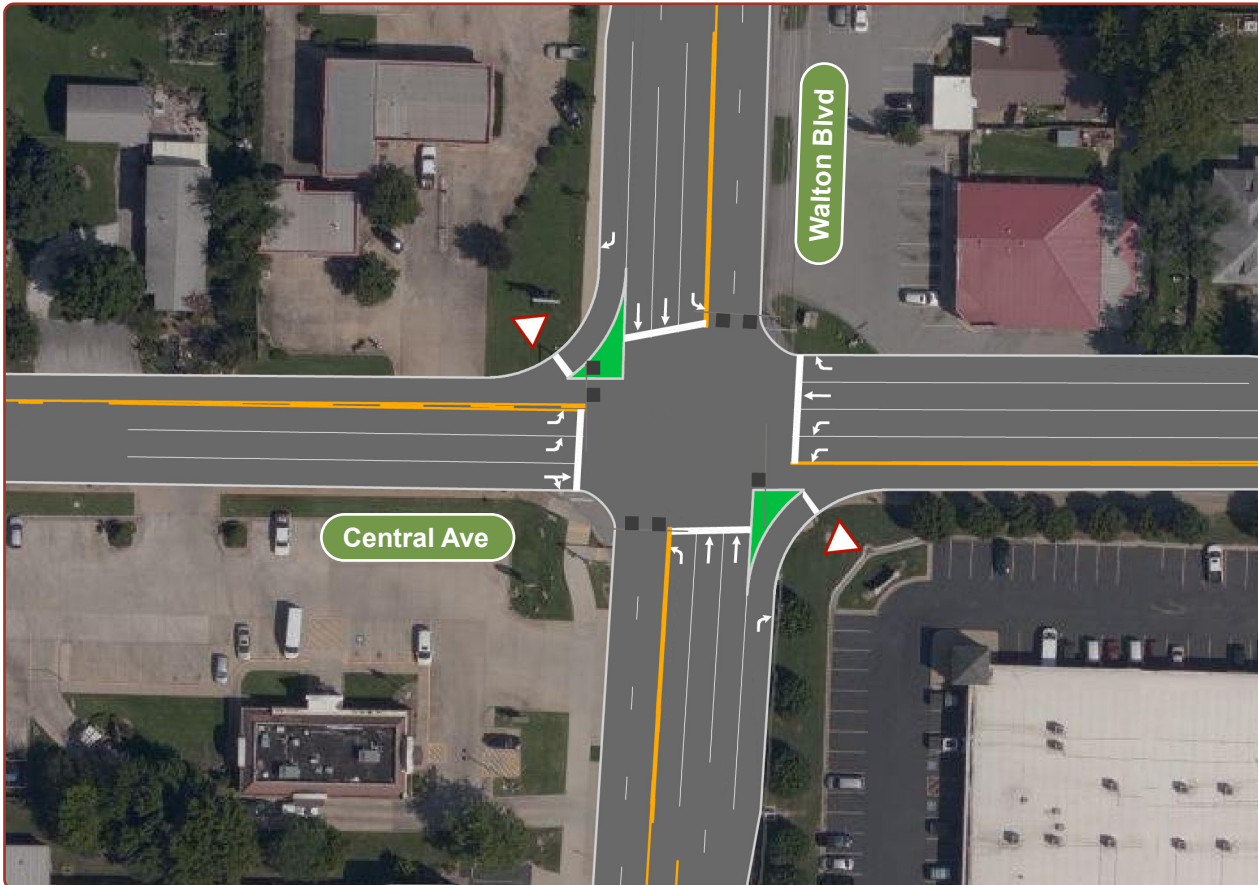

Project Timeline

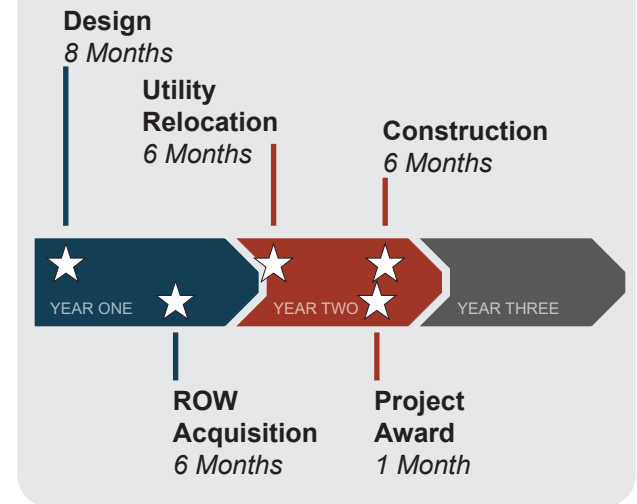

Estimated Costs

Task	Estimated Cost
Design/CE&I	\$ 290,000
ROW Acquisition	\$ 370,000
Utility Relocation	\$ 370,000
Construction	\$ 1,450,000
Total	\$ 2,480,000